







INDUSTRIAL Firefighting

VERSATILE PROTECTION

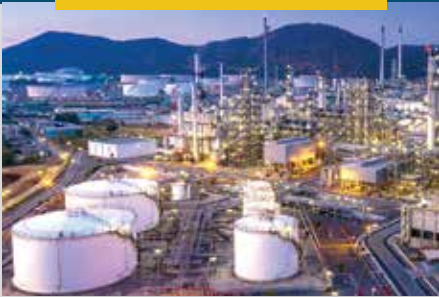

-  **INDUSTRIAL**
SPRINKLER + DELUGE
-  **FIRE BRIGADES**
MOBILE FIRE TRUCK SYSTEM
-  **MARINES**
OFFSHORE



A wide range of flow sizes and proportioning options available.

Our smallest model has a maximum flow of 180 LPM and our largest single model a capacity of 10,000 LPM flow. Our range covers flow rates of: 450, 600, 800, 1,000, 1,200, 1,800, 2,400, 3,200, 4,500, 6,000, and 8,000 LPM.

Special rates are available upon request.

FM-APPROVED

CLASS 5130

Our 3% models up to 3,200 LPM are available with an FM certificate of compliance. As of 2020, this also includes units with bronze and SS 316 L motors.



Proportioning Options

For fixed proportioning, we offer 1% and 3% as a system standard.

FIXED OPTIONS

0.1% 0.3% 0.5% 2% 2.75% 6%

SELECTABLE OPTIONS

0.3-0.6-1% 1-2-3% 0.5-3%

Pump Options

We offer two different system models: Piston Pump and Gear Pump units.

PISTON PUMP

Viscosities up to 4,500 cP.

GEAR PUMP

Viscosities up to 8,000 cP.

HAZARD CONTROL TECHNOLOGIES FIREMIKS' US DISTRIBUTOR

150 WALTER WAY, FAYETTEVILLE, GEORGIA 30214 / +1 770 719 5112 / HCT-WORLD.COM