

# WATER DRIVEN VOLUMETRIC PROPORTIONERS for Fire Brigades and Fire Trucks



## EASY TO INSTALL

COMPACT DOSING SYSTEM,  
NO NEED OF PTO OR ELECTRICAL  
POWER, KEEPS THE FIRE PUMP  
CLEAN FROM ADDITIVES

## EASY TO USE

RELIABLE MECHANICAL  
PROPORTIONER, DRIVEN BY THE  
WATER FLOW ONLY, NO NEED  
FOR PRESSURE BALANCING

## EASY TO TEST

ECONOMICAL AND ENVIRONMENTALLY  
BENEFICIAL TESTING WITH  
A DOSING RETURN VALVE AND  
SEPARATE FLOW METERS

[www.firemiks.com](http://www.firemiks.com)



Industrial - Sprinkler



Fire Brigades - Fire Trucks



Marine - Offshore


# Handy and flexible to use

## ONE FIREMIKS - SEVERAL NOZZLES

When using a FIREMIKS the firefighters get a flexible system, easy to adapt to different firefighting situations. The unit works within a wide pressure and flow range.

One can use several nozzles at the same time, quickly open and close them (pulsing), and place them at different distances and heights from FIREMIKS, fire pump or hydrant supply.

Lower pressure losses compared with Inductor giving longer throw length.

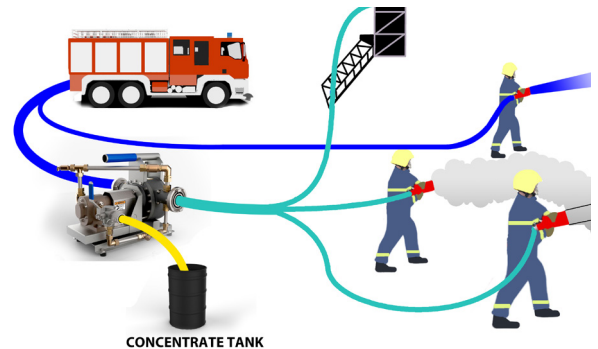


## A WIDE RANGE OF PROPORTIONING OPTIONS

For fixed proportioning we offer 1% and 3% as standard. Other fixed dosing rates are available on customer's request.

Models with selectable proportioning are available with 0,3-0,6-1% and 1-2-3%. For selected flow sizes 0,5-1-3%. Choosing the dosing rate is possible without stopping the fire fighting.

Suitable for the new SFFF concentrates. FIREMIKS is uniquely positioned by being able to offer two types of pumps: Piston pump models for viscosities up to around 4000-4500 cP and Gear pump models to around 8000 cP.

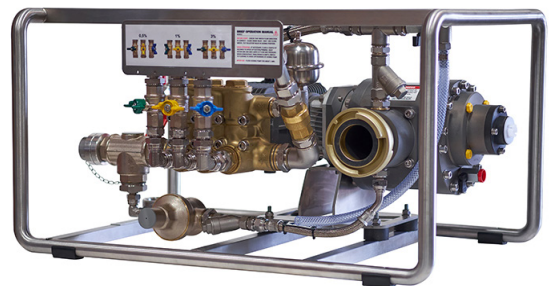

## A WIDE RANGE OF DIFFERENT FLOW SIZES.

From the smallest unit with max flow of 180 lpm up to 2400 lpm we offer 8 different flow sizes. Larger sizes are placed preferably on trailers. The units are equipped with handle and bottom bracket or with a sturdy surrounding frame.

Distributor:



**FIREMIKS Sole USA Distributor**

**Hazard Control Technologies, Inc.**

**Phone** 770-719-5112

**Email** info@hct-world.com

